

DIMMABLE – ULTRA SLIM LED OYSTER LIGHT

SL2105 DISC



CONSTRUCTION


- Polycarbonate housing
- Opal polycarbonate diffuser
- Double insulation
- Built-in high efficiency SMD LED chips
- Built-in trailing edge dimmable LED driver

IP RATING


- IP54 weatherproof

DIMENSIONS


SL2105/20

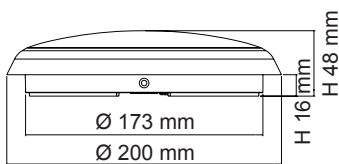

SL210530

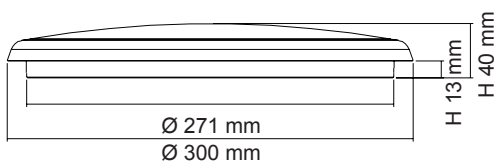

SL2105/40

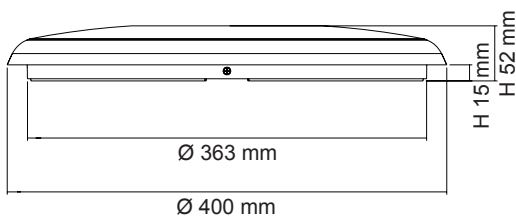

Model No.	Input	Power	Lumen	CCT	CRI	Dimensions Ø x H	Fitting Colour
SL2105/20WW	240V	12W	1050lm	3000K	>80	200 x 48 mm	White
SL2105/20DL	240V	12W	1100lm	5000K	>80	200 x 48 mm	White
SL2105/30WW	240V	25W	2000lm	3000K	>80	300 x 40 mm	White
SL2105/30DL	240V	25W	2200lm	5000K	>80	300 x 40 mm	White
SL2105/40WW	240V	30W	2800lm	3000K	>80	400 x 52 mm	White
SL2105/40DL	240V	30W	2900lm	5000K	>80	400 x 52 mm	White