

ULTRA SLIM LED OYSTER LIGHT

SL2108 DISH I


CONSTRUCTION

- Powder coated steel base
- Complete with two interchangeable white or silver trims
- Opal acrylic diffuser
- Built-in high efficiency SMD LED chips
- Constant current LED driver fitted

IP RATING

- IP44 weatherproof

DIMENSIONS

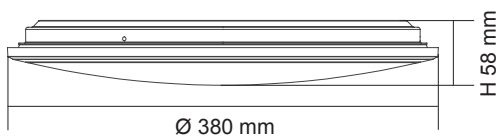

Model No.	Input	Power	Lumen	CCT	CRI
SL2108WW	240V	22W	1900lm	3000K	>80
SL2108DL	240V	22W	1900lm	5000K	>80


PHOTOMETRIC DATA

Unit: cd


SL2108 WW

C0/C180

C90/C270



SL2108 DL



ULTRA SLIM LED OYSTER LIGHT

SL2109 DISH II


CONSTRUCTION

- ABS base plate and housing
- Rear access installation design
- Opal acrylic diffuser
- Double insulation
- Built-in high efficiency SMD LED chips
- Constant current LED driver fitted

IP RATING

- IP44 weatherproof

DIMENSIONS

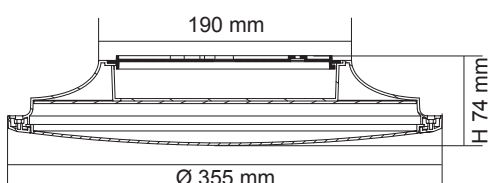

Model No.	Input	Power	Lumen	CCT	CRI
SL2109/40WW	240V	25W	2000lm	3000K	>80
SL2109/40CW	240V	25W	2200lm	4000K	>80
SL2109/40DL	240V	25W	2400lm	6000K	>80